

1 DESCRIPTION


The ASI1442 is an AES/EBU input module intended for use in the Hono AVB/CobraNet Custom network interfaces. It has eight channels of input, bundled as four stereo AES/EBU inputs that operate at 48kHz (CobraNet) and 48/96kHz (AVB) samples rates.

Up to four ASI1442 modules may be used in one Hono Custom. AudioScience's CobraNet implementation, based on the CobraNet chip used, allows for up to 16 AES/EBU inputs, out of a possible 32, to be used at any given time. AVB may use all 32 possible channels.

A unique feature of the ASI1442 is its interchangeable I/O connector. A choice of 50pin Centronics (ASI1491), StudioHub+™ (ASI1492) or Terminal Block (ASI1493), adapt to a variety of interconnection schemes with minimal custom wiring.

2 FEATURES

- Eight channels of input, bundled as four stereo AES/EBU inputs
- 48kHz (CobraNet) and 48/96kHz (AVB) operation
- Sample rate converters on all outputs
- Outputs maybe clocked from local 32kHz, 44.1kHz, 48kHz, or 96kHz clock
- Interchangeable Module Connectors with choice of 50pin Centronics connector, StudioHub+™ RJ-45, or Terminal Block
- Up to four modules can be used in one Hono Custom

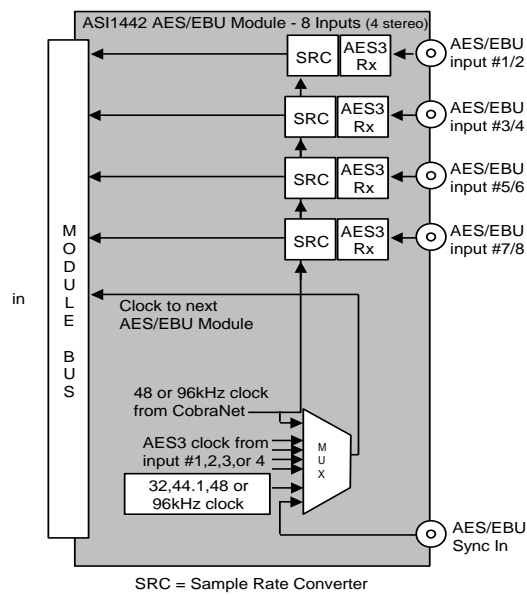

ASI1442



ASI1491
50 pin Centronics



ASI1492
StudioHub



ASI1493
Terminal Block

3 SPECIFICATIONS

AES/EBU INPUT

Type	AES/EBU (EIAJ CP-340 Type I / IEC-958 Professional)
Sample Rates	Internal: 32, 44.1, 48 and 96kHz External: 32, 44.1, 48 and 96kHz selectable from any input

SAMPLE RATE CLOCK

Internal - Cobranet	48kHz
Internal - AVB	48kHz or 96kHz

SIGNAL QUALITY

SNR	140dB
THD+N	135dB

CONNECTOR MODULES

ASI1491	50 pin Centronics
ASI1492	StudioHub compatible RJ-45 jacks
ASI1493	5 position 3.81mm pluggable terminal block (8 per module)

GENERAL

Bus	AudioScience Hono Custom series module bus
Dimensions	(Without Module Connector) 5.5" x 3.25" x 0.6" (140mm x 83mm x 15mm)
Weight	8 oz (227g) max
Operating Temperature	0C to 70C
Power Requirements	+5V @ 500mA

NOTES

4 REVISIONS


Date	Description
27 June 2009	Elaborated first page, second paragraph. Fixed minor errors on block diagram, first page. Updated format, including adding a REVISIONS section.
05 April 2010	Updated Section 5.3: RevE ASI1493 has a different AES/EBU pinout than revA-D.
06 April 2010	Page 1: Updated block diagram (AES3 Tx Clock, AES/EBU Sync In).
13 October 2017	Updated to include AVB compatibility

5 CONTENTS

1	DESCRIPTION	1
2	EATURES	1
3	SPECIFICATIONS	2
4	REVISIONS	3
5	CONTENTS	4
7	MODULE CONNECTORS	5
7.1	ASI1491 50PIN CENTRONICS	5
7.1.1	<i>CBL1145 – 8 Analog XLR In Cable</i>	5
7.2	ASI1492 STUDIOHUB+ (RJ45)	6
7.3	ASI1493 TERMINAL BLOCK.....	6
8	MODULE CLOCKING AND SRC	7
8.1	AES/EBU INPUTS	7

7 MODULE CONNECTORS

7.1 ASI1491 50pin Centronics

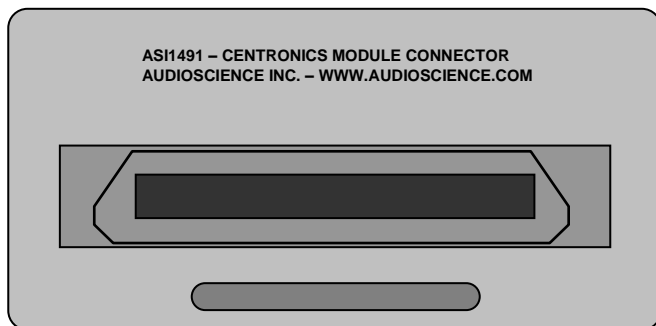

The ASI1491 Module Connector provides a 50pin Centronics connector (also referred to as a 50pin SCSI connector). AudioScience's CBL1145 XLR breakout cable can be used with this connector.

The table on the right shows the pinouts of the connector when used with the ASI1442 AES/EBU Module.


50pin Centronics Connector			
Signal	Pin #	Pin #	Signal
AES Sync In -	1	26	AES Sync In +
AES In 1 -	2	27	AES In 1 +
AES In 2 -	3	28	AES In 2 +
AES In 3 -	4	29	AES In 3 +
AES In 4 -	5	30	AES In 4 +
GND	6	31	GND
	7	32	
	8	33	
	9	34	
	10	35	
	11	36	
	12	37	
	13	38	
	14	39	
	15	40	
	16	41	
	17	42	
	18	43	
	19	44	
	20	45	
	21	46	
	22	47	
	23	48	
	24	49	
GND	25	50	GND

7.1.1 CBL1145 – 8 Analog XLR In Cable



CBL1145, purchased separately, can be used with the ASI1491 50pin Centronics connector and the ASI1442 AES/EBU module. It is a 50pin to 8 in XLR, balanced AES/EBU cable.

7.2 ASI1492 StudioHub+ (RJ45)

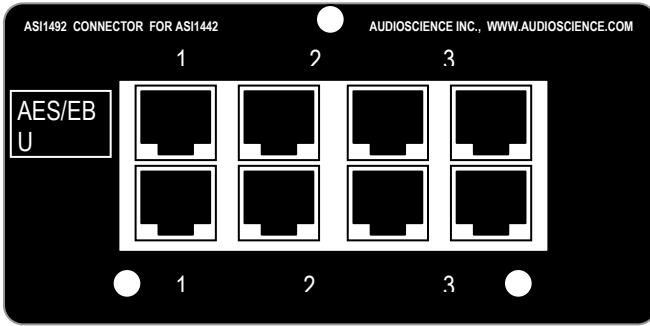

StudioHub (RJ45) Connections		
Pin	Function	Color Code
Shield	Shield	
1	Channel 1/3/5/7 +	White/Orange
2	Channel 1/3/5/7 -	Orange/White
3	Channel 2/4/6/8 +	White/Green
4	Ground	Blue/White
5		
6	Channel 2/4/6/8 -	Green/White
7		
8		

The ASI1492 StudioHub Module Connector provides each AES/EBU input on an RJ-45 type jack compatible with the Radio Systems StudioHub standard. This allows the AES/EBU signal to be transmitted using shielded twisted pair (STP) cable. Since AES/EBU audio is stereo, each AES/EBU connection supports a pair of audio channels.

The RJ45 connections are shown in the table to the right. In the diagram on the left, note that only the top input jacks are used.

For more information on the StudioHub standard, see www.studiohub.com.


7.3 ASI1493 Terminal Block

The ASI1493 Terminal block Connector provides 3.81mm pluggable terminal blocks.


Each 'In' in the images below represents a pair of audio channels.

NOTE that the pinouts changed between revD and revE of the ASI1493.

Rev A-D

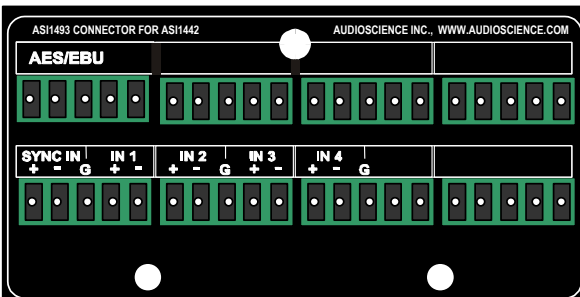


Rev E

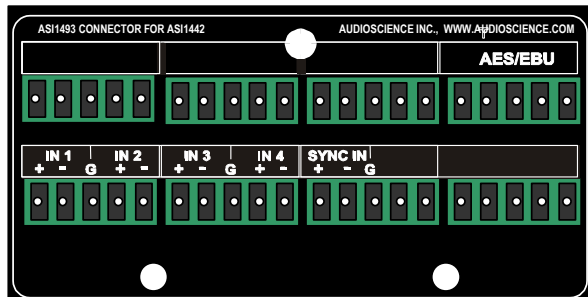

8 MODULE CLOCKING AND SRC

The following diagram shows the sample rate clocking scheme for the ASI1442 module.

ASI1442 AES/EBU Clocking

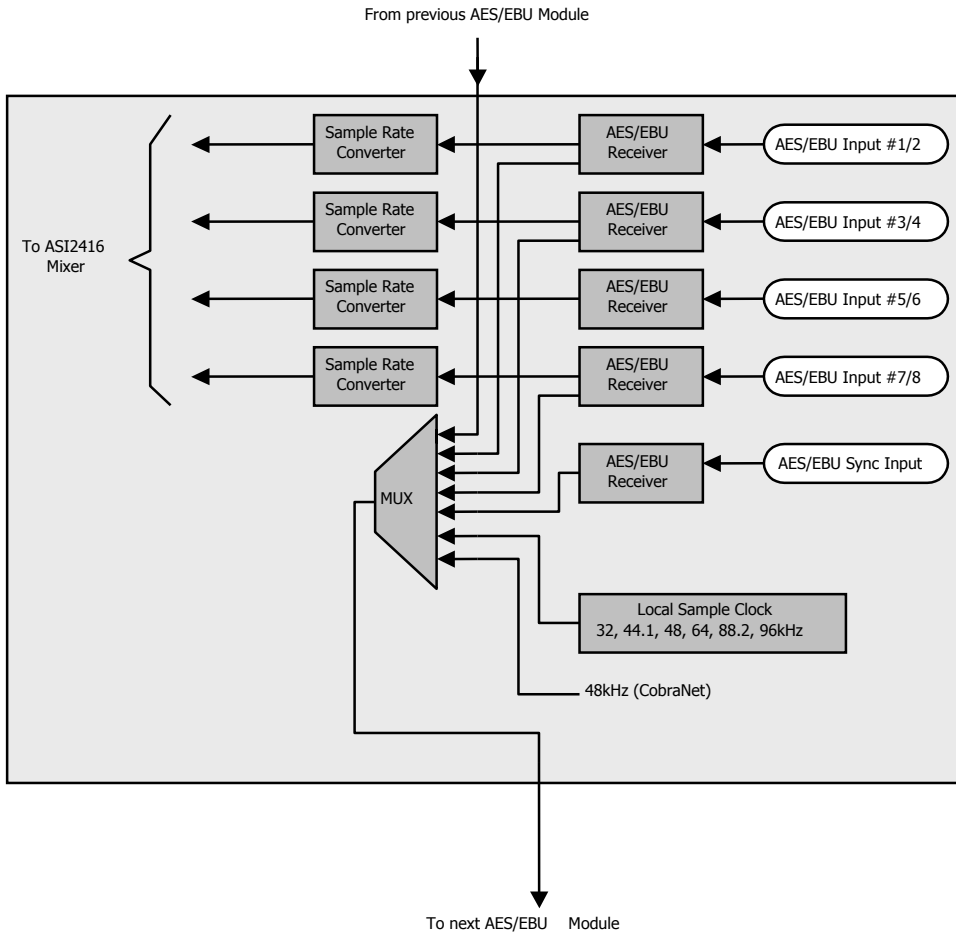

8.1 AES/EBU Inputs

Each AES/EBU input has a sample rate converter (SRC) on it and so may have a sample rate that is asynchronous to the rest of the system. Valid sample rates are 32, 44.1, 48, 64, 88.2 and 96kHz.

<end>