

**1 DESCRIPTION**


The ASI1443 is an AES/EBU output module intended for use in the ASI2416 Modular CobraNet™ Interface. It has eight channels of output, bundled as four stereo AES/EBU outputs.

Up to four ASI1443 modules may be used in one ASI2416, allowing up to 16 AES/EBU outputs in a 1RU interface.

A unique feature of the ASI1443 is its interchangeable connector. A choice of 50pin Centronics (ASI1491), StudioHub+™ (ASI1492), or Terminal Block (ASI1493) allows the module to accommodate a wide variety of interconnection schemes with minimal custom wiring.

**2 FEATURES**

- Eight channels of output, bundled as four stereo AES/EBU outputs
- 48kHz (CobraNet) operation
- Sample rate converters on all outputs
- Outputs maybe clocked from local 32kHz, 44.1kHz, 48kHz, or 96kHz clock
- Interchangeable Module Connectors with choice of 50pin Centronics connector, StudioHub+™ RJ-45, or Terminal Block
- Up to four modules can be used in one ASI2416

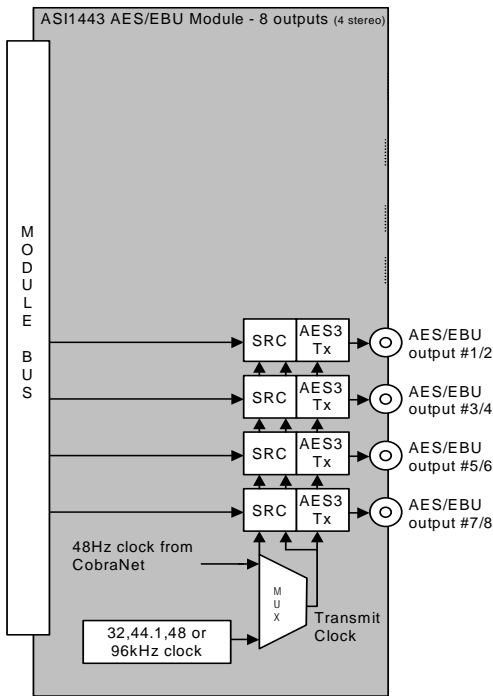

SRC = Sample Rate Converter



ASI1443



ASI1491  
50 pin Centronics



ASI1492  
StudioHub



ASI1493  
Terminal Block

### 3 SPECIFICATIONS

#### AES/EBU OUTPUT

Type AES/EBU (EIAJ CP-340 Type I / IEC-958 Professional)  
Sample Rates Internal: 32, 44.1, 48 and 96kHz.

#### SIGNAL QUALITY

SNR 140dB  
THD+N 135dB

#### CONNECTOR MODULES

ASI1491 50 pin Centronics  
ASI1492 StudioHub compatible RJ-45 jacks.  
ASI1493 5 position 3.81mm pluggable terminal block (8 per module)


#### GENERAL

Bus AudioScience ASI2400 series module bus  
Dimensions (Without Module Connector) 5.5" x 3.25" x 0.6" (140mm x 83mm x 15mm)  
Weight 8 oz (227g) max  
Operating Temperature 0C to 70C  
Power Requirements +5V @ 500mA



## 4 MODULE CONNECTORS

### 4.1 ASI1491 50pin Centronics

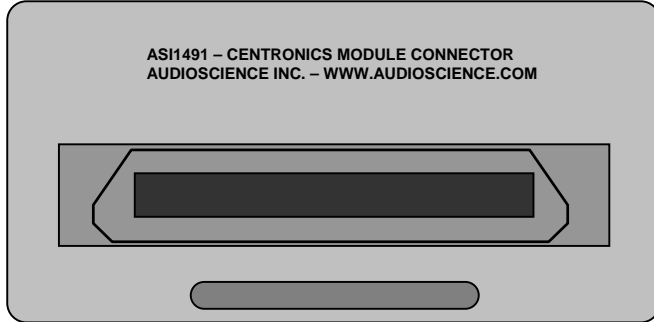

The ASI1491 Module Connector provides a 50pin Centronics connector (also referred to as a 50pin SCSI connector). AudioScience’s CBL1146 XLR breakout cable can be used with this connector.

The table on the right shows the pinouts of the connector when used with the ASI1443 AES/EBU Module.


50pin Centronics Connector			
Signal	Pin #	Pin #	Signal
	1	26	
	2	27	
	3	28	
	4	29	
	5	30	
GND	6	31	GND
AES Out 1 -	7	32	AES Out 1 +
AES Out 2 -	8	33	AES Out 2 +
AES Out 3 -	9	34	AES Out 3 +
AES Out 4 -	10	35	AES Out 4 +
	11	36	
	12	37	
	13	38	
	14	39	
	15	40	
	16	41	
	17	42	
	18	43	
	19	44	
	20	45	
	21	46	
	22	47	
	23	48	
	24	49	
GND	25	50	GND

#### 4.1.1 CBL1146– 8 Analog XLR Out Cable



CBL1146, purchased separately, can be used with the ASI1491 50pin Centronics connector and the ASI1443 AES/EBU module. It is a 50pin to 8 out XLR, balanced AES/EBU cable.

### 4.2 ASI1492 StudioHub+ (RJ45)

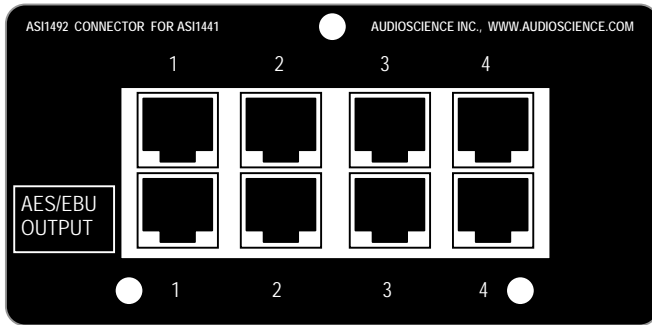


StudioHub (RJ45) Connections		
Pin	Function	Color Code
Shield	Ground	
1	AES/EBU +	Green/White
2	AES/EBU -	Green
3		
4		
5		
6		
7		
8		

The ASI1492 StudioHub Module Connector provides each AES/EBU output on an RJ-45 type jack compatible with the Radio Systems StudioHub standard. This allows the AES/EBU signal to be transmitted using shielded twisted pair (STP) cable. Since AES/EBU audio is stereo, each AES/EBU connection supports a pair of audio channels.

The RJ45 connections are shown in the table to the right. In the diagram on the left, note that only the bottom output jacks are used.

For more information on the StudioHub standard, see [www.studiohub.com](http://www.studiohub.com).

### 4.3 ASI1493 Terminal Block

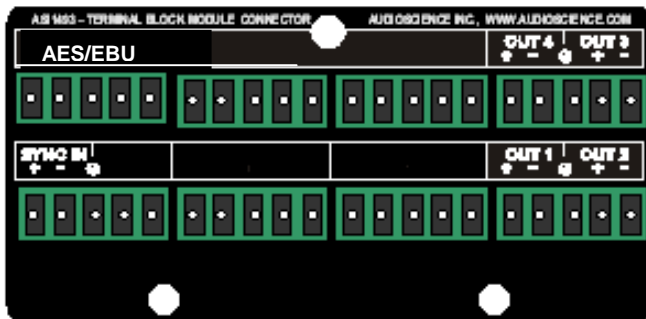


The ASI1493 Terminal block Connector provides 3.81 mm pluggable terminal blocks.

Each 'Out' in the diagram to the left represents a pair of audio channels.

## 5 MODULE CLOCKING AND SRC

The following diagram shows the sample rate clocking scheme for the ASI1443 module.

### ASI1443 AES/EBU Clocking

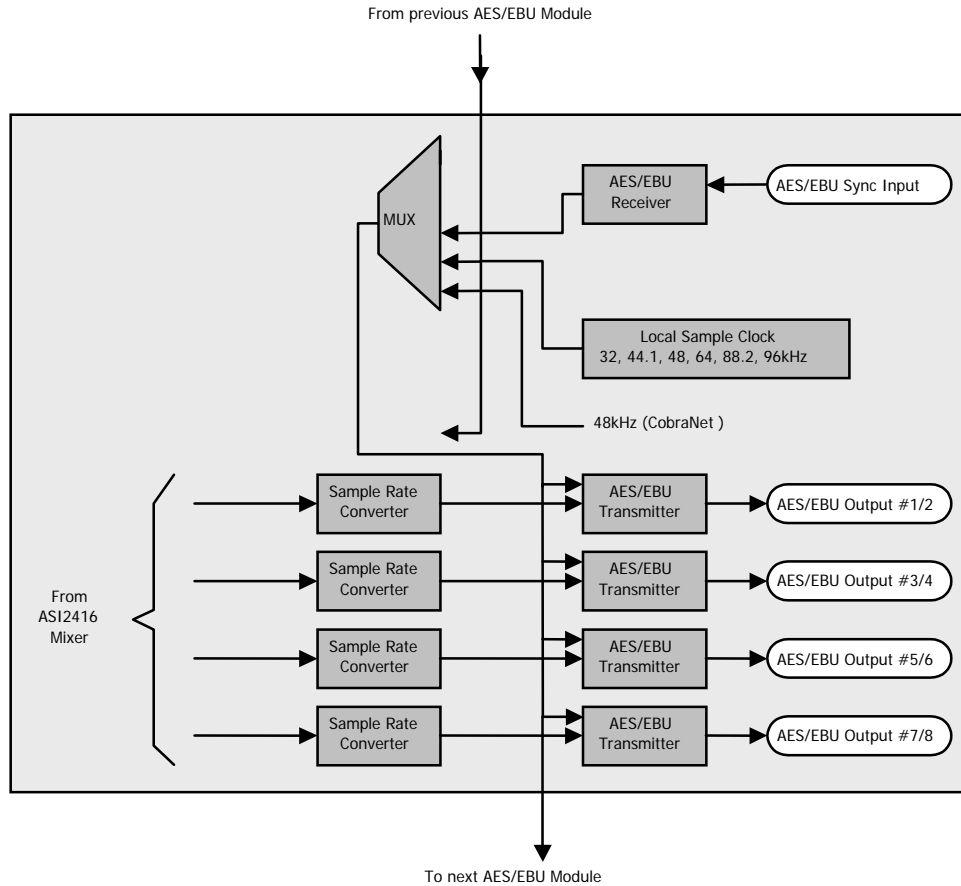

#### 5.1 AES/EBU Outputs

There are the four sample rate sources for clocking the AES/EBU outputs:

1. A sample rate from the ASI1441 module in the previous slot.
2. A local sample rate clock that may be set to 32, 44.1, 48, 64, 88.2 or 96kHz.
3. A sample rate derived from the AES/EBU Sync input (32, 44.1, 48, 64, 88.2 or 96kHz).
4. The ASI2416 CobraNet clock (48kHz).

**NOTE:** For option #1 to work correctly, multiple ASI1443 modules must be present in the ASI2416 in consecutive slots.

For Example:

Correct: Slot1=ASI1431, Slot2=ASI1443, Slot3=ASI1443

Incorrect: Slot1=ASI1443, Slot2=ASI1431, Slot3=ASI1443

<end>