

1 DESCRIPTION


The ASI1442 is an AES/EBU input module intended for use in the ASI2416 Modular CobraNet™ Interface. It has eight channels of input, bundled as four stereo AES/EBU inputs.

Up to four ASI1442 modules may be used in one ASI2416, allowing up to 16 AES/EBU inputs in a 1RU interface.

A unique feature of the ASI1441 is its interchangeable connector. A choice of 50pin Centronics (ASI1491), StudioHub+™ (ASI1492), or Terminal Block (ASI1493) allows the module to accommodate a wide variety of interconnection schemes with minimal custom wiring.

2 FEATURES

- Eight channels of input, bundled as four stereo AES/EBU inputs
- 48kHz operation (CobraNet)
- Sample rate converters on all inputs
- Interchangeable Module Connectors with choice of 50pin Centronics connector, StudioHub+™ RJ-45, or Terminal Block
- Up to four modules can be used in one ASI2416

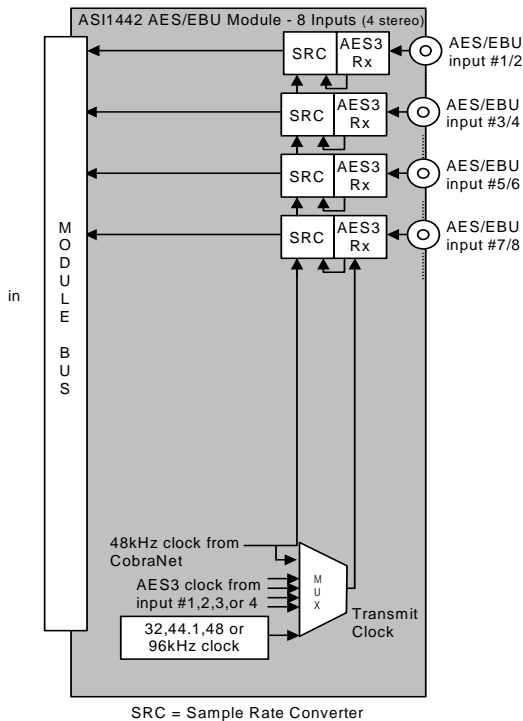

ASI1442



ASI1491
50 pin Centronics



ASI1492
StudioHub



ASI1493
Terminal Block

3 SPECIFICATIONS

AES/EBU INPUT

Type AES/EBU (EIAJ CP-340 Type I / IEC-958 Professional)
Sample Rates Internal: 32, 44.1, 48 and 96kHz.
External: 32, 44.1, 48 and 96kHz selectable from any input

SIGNAL QUALITY

SNR 140dB
THD+N 135dB

CONNECTOR MODULES

ASI1491 50 pin Centronics
ASI1492 StudioHub compatible RJ-45 jacks
ASI1493 5 position 3.81mm pluggable terminal block (8 per module)


GENERAL

Bus AudioScience ASI2400 series module bus
Dimensions (Without Module Connector) 5.5" x 3.25" x 0.6" (140mm x 83mm x 15mm)
Weight 8 oz (227g) max
Operating Temperature 0C to 70C
Power Requirements +5V @ 500mA



4 MODULE CONNECTORS

4.1 ASI1491 50pin Centronics

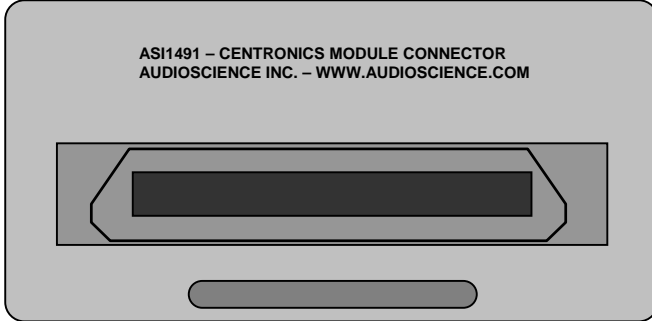

The ASI1491 Module Connector provides a 50pin Centronics connector (also referred to as a 50pin SCSI connector). AudioScience’s CBL1145 XLR breakout cable can be used with this connector.

The table on the right shows the pinouts of the connector when used with the ASI1442 AES/EBU Module.


50pin Centronics Connector			
Signal	Pin #	Pin #	Signal
AES Sync In -	1	26	AES Sync In +
AES In 1 -	2	27	AES In 1 +
AES In 2 -	3	28	AES In 2 +
AES In 3 -	4	29	AES In 3 +
AES In 4 -	5	30	AES In 4 +
GND	6	31	GND
	7	32	
	8	33	
	9	34	
	10	35	
	11	36	
	12	37	
	13	38	
	14	39	
	15	40	
	16	41	
	17	42	
	18	43	
	19	44	
	20	45	
	21	46	
	22	47	
	23	48	
	24	49	
GND	25	50	GND

4.1.1 CBL1145 – 8 Analog XLR In Cable



CBL1145, purchased separately, can be used with the ASI1491 50pin Centronics connector and the ASI1442 AES/EBU module. It is a 50pin to 8 in XLR, balanced AES/EBU cable.

4.2 ASI1492 StudioHub+ (RJ45)

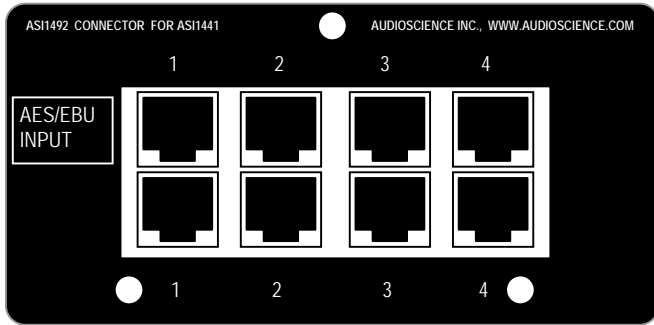


StudioHub (RJ45) Connections		
Pin	Function	Color Code
Shield	Ground	
1	AES/EBU +	Green/White
2	AES/EBU -	Green
3		
4		
5		
6		
7		
8		

The ASI1492 StudioHub Module Connector provides each AES/EBU input on an RJ-45 type jack compatible with the Radio Systems StudioHub standard. This allows the AES/EBU signal to be transmitted using shielded twisted pair (STP) cable. Since AES/EBU audio is stereo, each AES/EBU connection supports a pair of audio channels.

The RJ45 connections are shown in the table to the right. In the diagram on the left, note that only the top input jacks are used.

For more information on the StudioHub standard, see www.studiohub.com.

4.3 ASI1493 Terminal Block

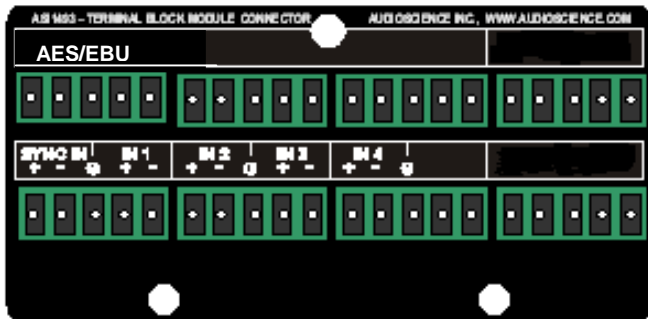


The ASI1493 Terminal block Connector provides 3.81mm pluggable terminal blocks.

Each 'In' in the picture to the left represents a pair of audio channels.

5 MODULE CLOCKING AND SRC

The following diagram shows the sample rate clocking scheme for the ASI1442 module.

ASI1442 AES/EBU Clocking

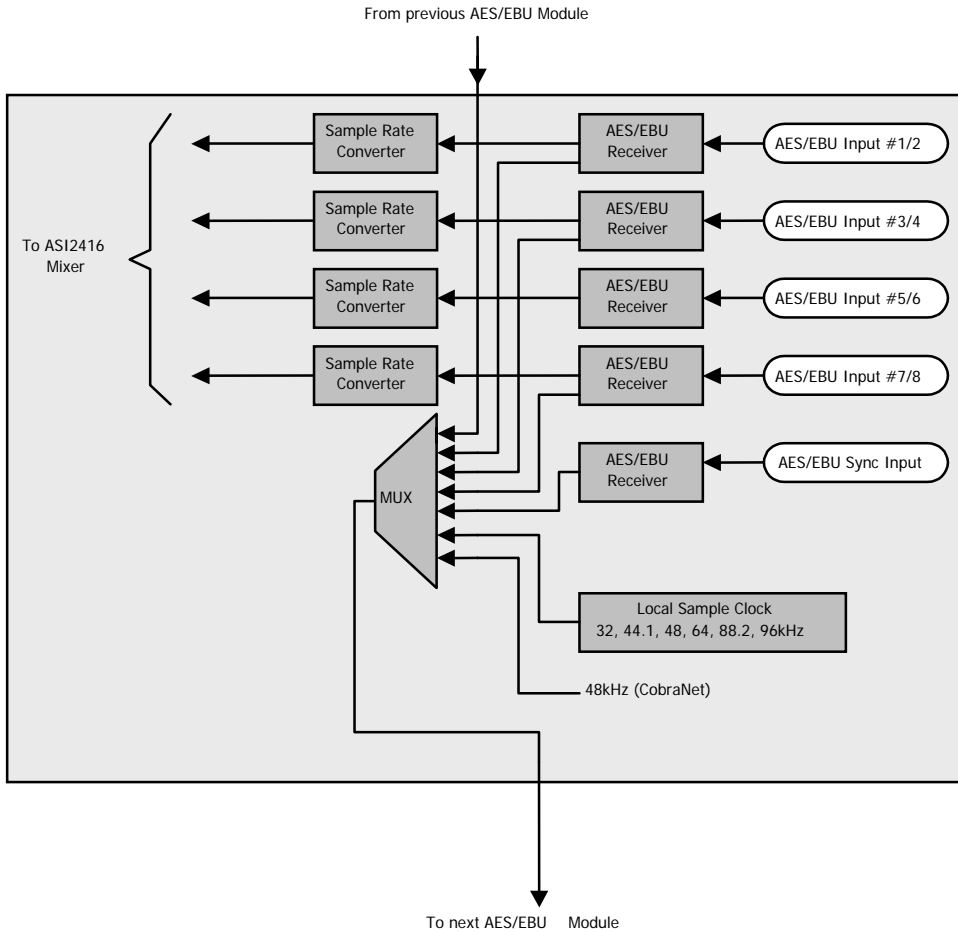

5.1 AES/EBU Inputs

Each AES/EBU input has a sample rate converter (SRC) on it and so may have a sample rate that is asynchronous to the rest of the system. Valid sample rates are 32, 44.1, 48, 64, 88.2 and 96kHz.

<end>